


## The ideal system for disinfecting **all surfaces** in total security!

- **No chemical products**
- Tested under the **AFNOR NF T72-281** standard for airborne disinfection of surfaces
- **Eliminates at least 99.99% of micro-organisms, bacteria and viruses** (including SARS-COV-2 / Coronavirus)
- The best cost/efficiency ratio available for surface disinfection
- Adapted to all types of surfaces **without side-effects or deterioration**
- A surface disinfection concept offering **confidence and reassurance to your clients and personnel**

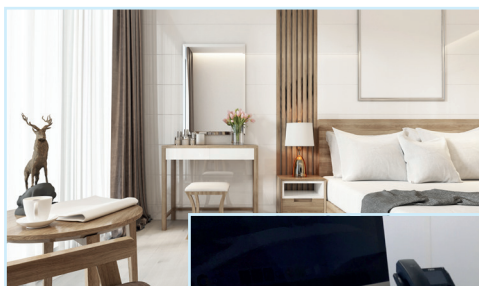

### How UV acts

UV-C rays penetrate the heart of the DNA at 254 nanometres, the optimal wavelength for eradicating microorganisms (virus, bacteria, algae, yeast, mould...), disrupting the cell metabolism through to total destruction.

## The advantages of BIO-SCAN®

- **A certified, tried and tested process**
- Treatment time of **just 8 seconds!**
- **Practical, ergonomic and easy to use** by anyone
- **No chemical products**, no risk to health or the environment
- Economical: low purchase price and fast return on investment



Supplied by:

Call Us: +44(0)1442 843640

Email Us: [enquiries@aquaozone.co.uk](mailto:enquiries@aquaozone.co.uk)

Pioneer House 30, Celtic Court, Ballmoor, Buckingham, MK18 1RQ




**AquaOzone**

A fresh idea

# BIO-SCAN<sup>®</sup> Light

BIO-UV  
Group

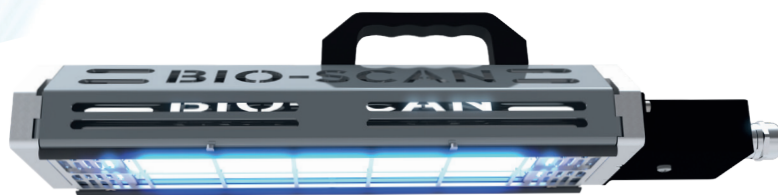

	Number of lamps	Electric power (W)	Dimensions W x L (mm)	Weight (kg)	Voltage (V)	Frequency (Hz)	Power consumption (W)
BIO-SCAN <sup>®</sup> Light 233	2	33	110 x 430	1	110-230	50/60	66
BIO-SCAN <sup>®</sup> Light 255	2	55	110 x 702	1.5	110-230	50/60	110
BIO-SCAN <sup>®</sup> Light 455	4	55	210 x 702	3	110-230	50/60	220

## Technical characteristics BIO-SCAN<sup>®</sup> Light range

2 year  
guarantee

- **Eliminates at least 99.99% of micro-organisms, bacteria and viruses** (including SARS-COV-2 / Coronavirus)
- Contact time: **8 seconds!**
- Convenient, ergonomic and easy to use by everyone
- A complete unit in a transport bag with shaped protective mousse, including: the BIO-SCAN<sup>®</sup> system, the electric unit with time counter, power supply cables, 1 protective mask, 1 pair of gloves (additional quantities available) and reactive stickers.  
**Cigar lighter socket optional.**
- 4.5m power supply cable, socket to device (extension lead possible)
- Presence of a deflector to concentrate the maximum UV-C rays onto the surface to be treated
- On/off switch, adjustable handle
- Lamp lifespan: 1000 hours (lamps specially designed for surface treatment, a BIO-UV Group patent)
- **Designed and manufactured in France**



### BIO-UV Group

850 avenue Louis Médard  
34400 LUNEL - FRANCE  
Tel. +33(0)4 99 133 911  
contact@bio-scan.tech  
[www.bio-uv.com](http://www.bio-uv.com)

